



PRODUCT
CATALOG
SWING GATE
CP - 3003












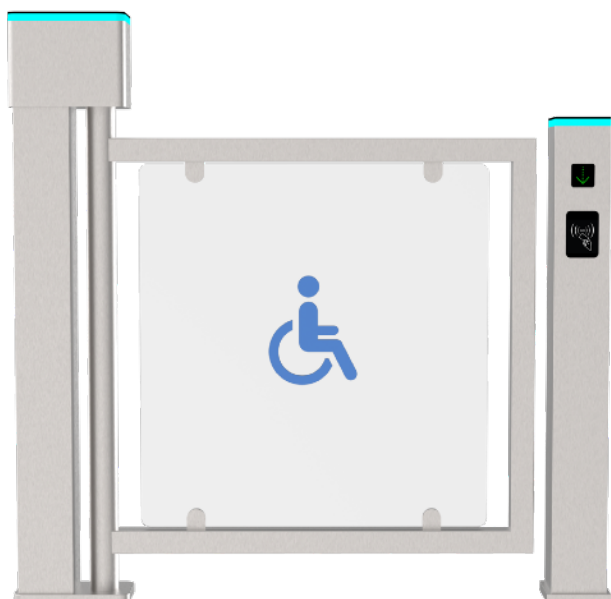

SWING GATE CP-3003



Our gates come with relay signals and RS485/RS232 interfaces. You can use your own access control system, or we can provide a complete access control system to you.



-  Remote control
-  RFID card
-  QR code/ barcode
-  Counter
-  Face recognition
-  Fingerprint recognition
-  Coin/Card collection
-  Button

The [SWING GATE CP-3003](#) gate is designed widely used for handicapped , luggage ,cart, etc access control. The lane width is 900mm.The gate is made of 304stainless steel. And there is LED light on top to indicate the status of the gate.



PASSING SPEED



PASSAGE FOR DISABLE



BI-DIRECTION



110V-220V
POWER SUPPLY



ANTI-TAILGATING






PROTECTIVE LEVEL



Dimension	1290*140*1265mm(4.23*0.46*4.15ft)
Material	SUS 304
Swing arm Material	Stainless steel and Acrylic
Passage Width	900mm(2.95ft)
Passage direction	Unidirectional/Bi-directional
Mechanism	DC Brushless Motor with Cluth
Pass rate	15-20 persons/minute
Operating time	0.2 seconds
Power Supply	100V-240V 50/60Hz
Open Signal	Passive Relay (Dry Contact)
MCBF	1,000,000 Cycles
Working Temperature	-40°C ~ 70°C
Working Environment	Indoor

Relative Humidity 95% Maximum

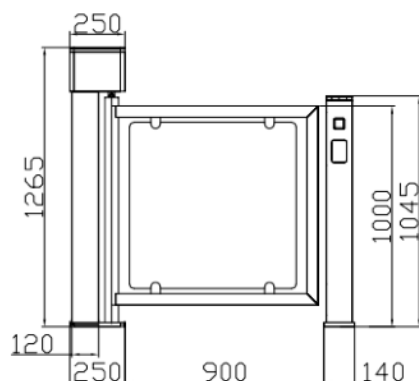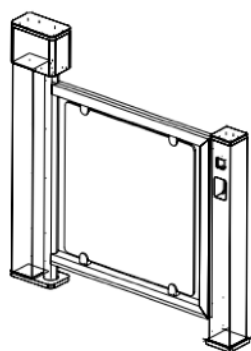

- **LED STRIP**

The color of the light strip on the top cover changes color depending on the status of the gates.

- **EMERGENCY EXIT**

The function allows free passage in the event of an emergency or power outage, automatic reset when power is restored.

- **WORKING DIRECTION**

Single directional or Bi-directional is optional.

- **AUTOMATIC RESET**

The flap arms will lock automatically within 5s if a person delay to access. (The time can be adjusted in the control board)

- **FAST UNLOCK**

When there is a valid signal ,the gate will unlock within 0.2s. (The time can be adjusted in the control board)


- Material: 304 stainless steel to 316 stainless steel, or iron with powder coated (color can be customized).
- Mounting base (for above floor wiring) and removable base (for temporary events) can be added.
- Cutouts can be customized to fit any reader. The cutouts can also be canceled.
- LOGO can be customized.
- OEM& ODM service is available.

If you need a dimension drawing according to the site, please contact us.





Powered of equipment
with Super Capacitor Backup

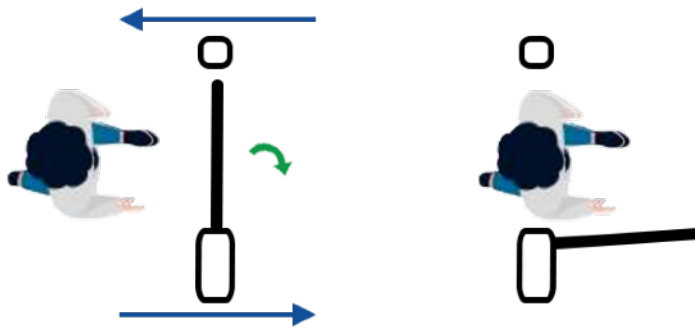

In case of a power outage, swing arms are unlocked
and open automatically.



Left open



Standby



Right open

